MSA Latchways® Personal Rescue Device (PRD®)



Integrated harness system for self rescue





Latchways PRD



MSA Latchways Personal Rescue Device (PRD®)

MSA has revolutionized the rescue process with the development of the Latchways PRD—an integrated harness system allowing self-rescue. The lightweight, unobtrusive rescue device is contained in a small 'backpack' attached to a full body harness and is designed to be used in conjunction with a fall protection system or anchor point.

In the event of a fall the Latchways PRD harness suspends the user and then allows a gentle lowering to the ground in a controlled descent. The device features a 65 ft (20 m) spool of Aramid rope which is released at a controlled rate through an integral braking mechanism. The innovative design uses quality components and a limited number of moving parts to enable 100% mechanical integrity.

The Need for a Rescue Plan

There is a legal obligation to have a full and comprehensive rescue plan in place when individuals are working at height. OSHA standards require employers to make specific provisions for emergency planning.

An example of this is 1956.502(d)(20) 'Fall protection systems criteria and practices' which states "The employer shall provide for prompt rescue of employees in the event of a fall or shall assure that employees are able to rescue themselves".



Minimal Training and Fast Rescue

User Training

Unlike all other rescue kits, no specialist training is required as the Latchways PRD is worn in place of a standard full body harness and activation is achieved by simply pulling the release cord.

Pre-use Checks

The Latchways PRD has been designed to be user-friendly so pre-use checks are minimal. The descent device, harness and backpack should be checked for any signs of:

- use (a descent has been performed)
- damage
- corrosion
- · chemical attack

Periodic examination is required at least annually or more

frequently to adhere with corporate PPE inspection schedules. User Instructions 2 Open the flap on the **1** *Check the ground below* right shoulder strap to to ensure descent path is clear and a safe access the release cord. landing is possible. 3 Pull sharply on the Prepare for landing release cord. by bending knees.



Key facts

Descent Height	65 ft (20 m)
Complete Weight	7.9 lbs (3.6 kg)
	(2.2 lbs /1 lsa) l

Training

(2.2 lbs (1 kg) harness/ 5.7 lbs (2.6 kg) rescue device)

User Weight 130 - 310 lbs (59 - 140 kg) **Descent Speed** 4.1 ft (1.25 m) per second

Secondary Should the user not be able to rescue Release themselves, the device can be activated Mechanism by a third party

Component Parts Descent line made from Aramid rope (UHMwPE rope with Aramid overbraid)

no annual user refresher training required

Minimal user training required—

Periodic examination limited to a series Maintenance of visual inspections carried out by a competent person (full instructions

provided)



Standards

The Latchways PRD consists of a full body harness and integral descender device that conforms to all required standards.

The harness conforms to:

- ANSI Z359.11:2014
- CSA Z259.10-12 (excludes arc flash models)

The descender device conforms to:


- ANSI Z359.4:2013
- CSA Z259.2.3-12 (excludes arc flash models)

The backpack and harness are:

- Waterproof and dustproof IP56 (Ingress Protection)
- -40° F to +140° F (-40° C to +60° C) Operating temperature
- Successfully assessed against ATEX category Ex II 2 G c IIC T3.

The Arc Flash model has been tested to ASTM F887-11.

EVOTECH® Full-Body Harness Sizing Guide

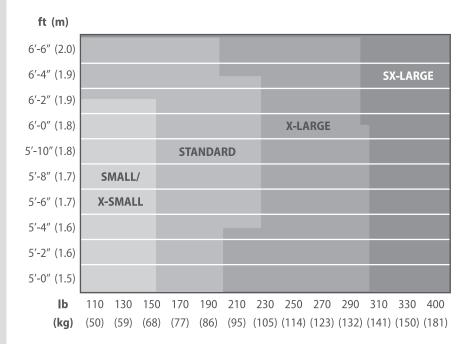

Ordering Information

PRD	Harness Type			Size		Line	Standards		
Part Number	EVOTECH	EVOTECH Lite	EVOTECH Arc Flash	STD	XLG	Length	ANSI Z359	CSA Z259	OSHA
10176307						65 ft			
10176308						65 ft			
10176309						65 ft			
10176310						65 ft			
10176311						65 ft			
10176312						65 ft			

Latchways Personal Rescue Device (PRD)

Ease of Use

The PRD's patented components have been designed to fit neatly into the 'backpack' to ensure the worker can safely go about their daily work. The backpack zips onto the harness so that it becomes part of everyday wear for those who work at height. The harness is lightweight and unobtrusive but also robust, ensuring it can withstand the rigours of the harshest working environments.



Rescue Benefits

- Significantly reduces rescue time
- Always available
- Self-activated
- Intuitive use
- Clear rescue plan
- Improves user safety



The Latchways PRD range

The Latchways PRD range now also includes the EVOTECH, EVOTECH Lite, and EVOTECH Arc Flash Full-body Harnesses.



Latchways PRD EVOTECH Full-body Harness



Latchways PRD EVOTECH Lite Full-body Harness



Latchways PRD EVOTECH Arc Flash Full-body Harness

Rescue Pole

The Latchways Rescue Pole is designed to be used by a third party. Should the user be unable to conduct a self-rescue, the third party can activate the Latchways PRD's built-in secondary descent release mechanism. The overall length of the pole is 2.7 ft (800 mm) when retracted and 11.1 ft (3400 mm) when extended.











Our Mission

MSA's mission is to see to it that men and women may work in safety and that they, their families and their communities may live in health throughout the world.

MSA: Because every life has a purpose.

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.

ID 4600-013-MC / September 2016 © MSA 2016 Printed in U.S.A.

MSA – The Safety Company 1000 Cranberry Woods Drive Cranberry Township, PA 16066 USA Phone 724-776-8600

1-800-967-0398

www.MSAsafety.com
U.S. Customer Service Center
Phone 1-800-MSA-2222

MSA Canada

Fax

Phone 1-800-672-2222 Fax 1-800-967-0398

MSA Mexico

Phone 01 800 672 7222 Fax 52 - 44 2227 3943