

## SmartLine036-4

Conventional control panel with 4 zones expandable to 36



The SmartLine conventional fire-detection control panel series offers a 2 zone non-expandable model (SmartLine020-2), a 4 zone model expandable to 20 zones (SmartLine020-4) and a 4 zone model expandable to 36 zones (SmartLine036-4).

The extreme compactness, trouble-free installation, uncomplicated programming procedures and simple end-user operation make this highly competitive control panel ideal for all small and medium applications, especially those applications where fast installation and programming are among the most important aspects of the system. The numerous functions (timers, equational logic, etc.), extensive flexibility (automatic output balancing, multifunction inputs, customizable outputs, gas function integration, etc.), and innovative connectivity capabilities (RS485 BUS for power supply stations, Internet connection, etc.), provide the tranquillity of knowing for sure that this powerful tool is capable of satisfying every need of every type of installation.

SmartLine control panels have supervised outputs (one on the motherboard and one on each added expansion) for the activation of audio-visual signalling devices, a customizable relay output, fault signaling outputs and two 24V outputs (one constant and one interruptible by installer-defined conditions). Additionally, each detection zone provides a terminal which can be configured as: open-collector output (activated by programmable conditions), supervised input, or Gas 4-20mA detector interface.

System information is provided through the graphic display and LEDs on the control panel frontplate. The RS485 BUS supports 4 remote repeater panels (SmartLetUSee/LCD-Lite). These repeater panels replicate all the fire alarm system data and allow users to access and control the system in accordance with their authorized access level. The BUS also supports two power-supply stations which can be connected in such a way as to allow supervision of their functionality and activation/deactivation of their output power during predefined conditions.


Programming the system from the control panel is straightforward and trouble-free thanks to the easy-to-follow instructions on the display. The system can also be programmed by means of the SmartLeague software application. This intuitive programming software greatly simplifies the programming procedure. The SmartLAN/485 board allows the control panel to connect to an Ethernet network for remote access via the Internet. Once the remote connection has been established, it is possible to modify the configuration parameters, upload/download programming data and/or manage the system by means of the supervisory software based on SmartLook graphic maps.

Addition of a SmartLetLoose/ONE fire extinction board to any SmartLine series fire control panel provides the system with GAS extinguisher control capabilities in compliance with EN12094-1.

SmartLetLoose/ONE enhanced control panels provide all the functions required by the applicable normative and are capable of managing all devices required for fire detection system management (refer to “Accessory items for Fire extinction systems”). SmartLine fire extinction control panels can operate autonomously or can interface with addressable analogue control panels from the SmartLoop series by simply connecting them to the RS485 BUS of the latter (extinction stations for addressable systems).

**DIAGRAM KEY**

- A Line 1 detectors
- B Line 2 detectors
- C SmartLine fire extinction control panel
- D Extinguishing gas cylinders.
- E Gas release nozzles
- F Gas collectors
- G Pneumatic release valve
- H Pilot cylinder for gas release
- I Pilot cylinder electrovalve
- L Pressure switch
- M Manual activation button
- N Stop extinction button
- O Audio/Visual signaller of imminent gas release
- P Audio/Visual signaller of gas present

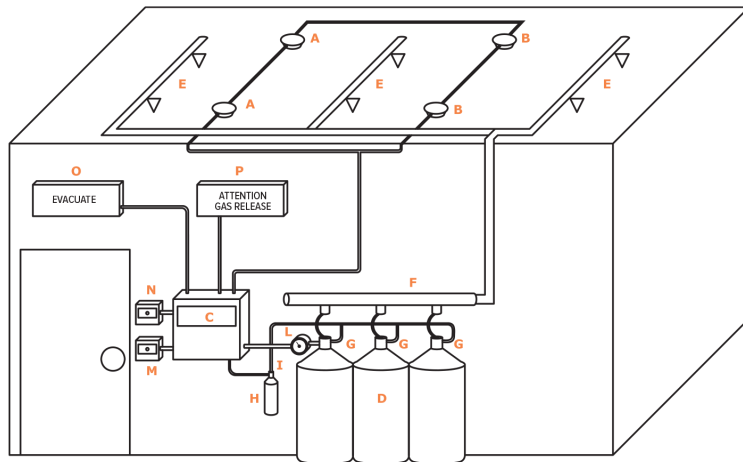

Application diagram

**Main Features**

- Certified EN12094-1
- Microcontroller board supervised by the CPU
- Indicator LEDs (status, disabled, faults)
- Supervised terminals for manual fire extinction commands
- Supervised terminals for STOP fire extinction commands
- Supervised terminals for pressure switch control
- Supervised output for fire suppression system activation
- Supervised output for signaling activation (pre-extinguish)
- Supervised output for “Gas in area” signaling

**Application diagram**

