

## Axis EN Mounting Base

This standard intelligent detector low profile mounting base has been designed for use with any of the Axis intelligent detector range.


The base's layout allows plenty of space for cable access and has multiple mounting-hole positions for use with a variety of back boxes. The unit has terminations for loop wiring, remote indicator connection and termination of shield cabling. When no device is fitted into the base, an automatic spring connection maintains loop continuity ready for loop cable testing.

Once the device is refitted the spring is displaced, allowing the loop isolators to operate.



### Features

- High reliability
- Device locking capability
- Easy central cable entry
- Integral device identification tab
- Remote indicator connections
- Built-in continuity spring

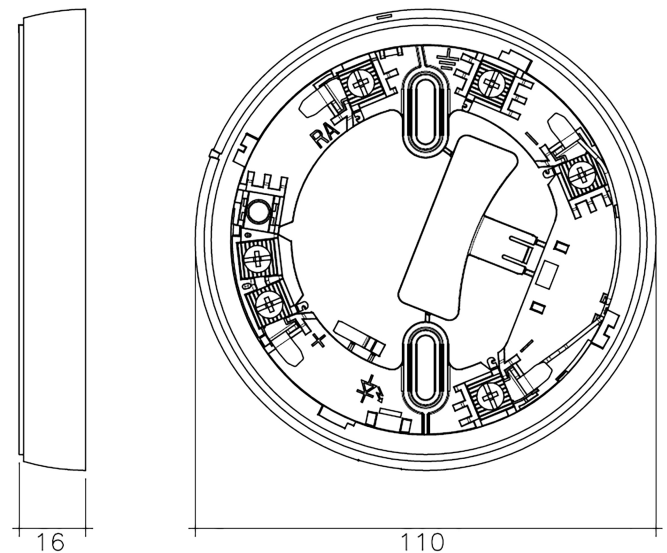

### Specification

|                                        |                |
|----------------------------------------|----------------|
| Dimensions (W x D)                     | 110 x 16 mm    |
| Operating temperature range (no icing) | -10°C to +55°C |
| Maximum humidity (non condensing)      | 95% RH         |
| Weight                                 | 50 g           |

### Order Codes and Options

|         |                    |
|---------|--------------------|
| Axis-MB | Axis Mounting Base |
|---------|--------------------|

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK T: +44 (0)345 894 7000, E: [enquiries@advancedco.com](mailto:enquiries@advancedco.com),  
W: [www.advancedco.com](http://www.advancedco.com)

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.