


Addressable MCP electronic module with isolator, Series 9200, esserbus

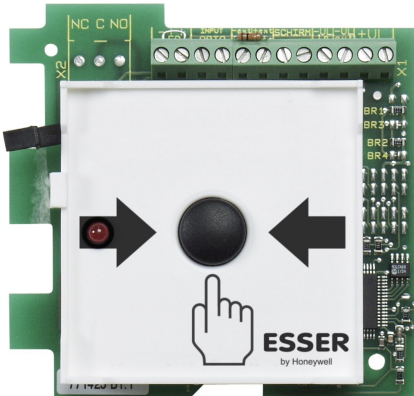

Part-No.: 804473.10

Approval: VdS with housing 704801.10

Printed with pictograms in accordance with EN 54-11

Common technical data

Operating voltage	8 ... 42 V DC
Quiescent current @ 19 V DC	45 μ A
Alarm current @ 9 V DC	9 mA
Alarm current w/o communication curtain	18 mA
Contact load	30 V DC/1A
No. of detector/zone	10/zone, 127/loop (VdS)
Alarm display	LED, red
Connection terminal	0.6 mm ... 1.5 mm ²
Application temperature	-20 °C ... 70 °C
Storage temperature	-30 °C ... 75 °C
Air humidity	< 95 %
Type of protection	IP43 (with housing)
Weight	approx. 100 g (w/o housing)
Detector specification	EN 54-11, type B
Dimensions	W: 95 mm H: 95 mm D: 25 mm
Declaration of Performance	DoP-20481130701



Both housing and electronic module need to be ordered. Not all possible combinations of electronic modules and housings are approved by VdS. The approved combinations are listed in the VdS approval field for the corresponding electronic module.