


## Dräger Saver CF N (NIOSH) Emergency Escape Breathing Apparatus (EEBA)

Simple to don and easy to operate, this hood-based, positive-pressure breathing device can be used with minimal training. The Dräger Saver CF N is highly visible and was designed to be suitable even for people with spectacles or facial hair. When opened, the Dräger Saver is automatically activated and begins feeding a continuous supply of breathing air. The Saver gives the wearer the precious additional time needed to exit the area safely.

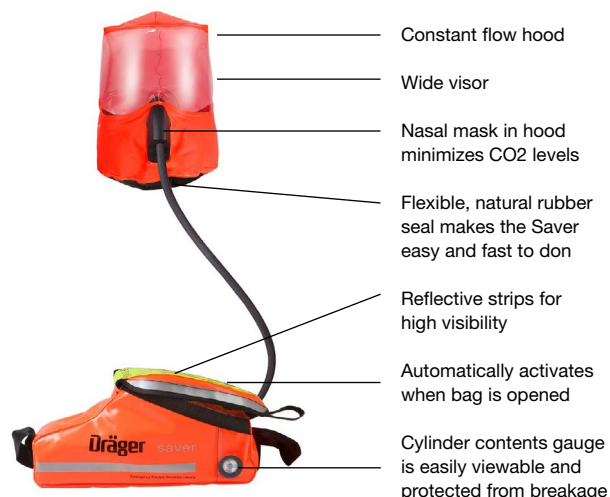

### UP TO 15 MINUTES OF LIFESAVING AIR

The Dräger Saver utilizes a simple, fail-safe reducer system with excellent flow characteristics, providing a consistent rate of air flow until the cylinder is completely empty. It can be equipped with cylinders which can hold either a 5, 10, or 15 minute supply of air. The flame-retardant hood incorporates a large visor for maximum peripheral vision.

### LOW-MAINTENANCE PROTECTION

The Dräger Saver requires very little service or maintenance. A transparent window on the soft bag lets you check the cylinder pressure gauge easily without unpacking the unit. The cylinder can be refilled without the need to remove it from the bag.

### HIGHLY VISIBLE, EVEN UNDER ADVERSE CONDITIONS

Packaged in an integrated soft bag, the Saver can be easily wall-mounted in strategic locations in potentially hazardous areas. The bright orange bags feature reflective panels for enhanced visibility, even under low lighting conditions. The Saver is compact and lightweight and can be worn either as a chest bag or over the shoulder. Made from highly resistant materials, it is washable, flame retardant and allows water to drain freely.

#### TECHNICAL DATA

|                                   | Saver CF5 N<br>(5 Minute) | Saver CF10 N<br>(10 Minute) | Saver CF15 N<br>(15 Minute) |
|-----------------------------------|---------------------------|-----------------------------|-----------------------------|
| Size                              | 360 x 240 x 110 mm        | 460 x 240 x 80 mm           | 460 x 240 x 90 mm           |
| Cylinder charging pressure        | 3000 psi                  |                             |                             |
| Airflow rate to the hood          | 35–37 L/min.              |                             |                             |
| Operating temperature             | -15°C to +60°C            |                             |                             |
| Approvals                         | NIOSH, ABS, TC            |                             |                             |
| Weight including charged cylinder | 3.9kg                     | 5.1kg                       | 5.5kg                       |



### ORDERING INFORMATION

| Dräger Saver CF NIOSH  | Part. No. |
|------------------------|-----------|
| Saver CF5 N (5 min.)   | 40 42 055 |
| Saver CF10 N (10 min.) | 40 42 056 |
| Saver CF15 N (15 min.) | 40 42 057 |

