



P.N 13100

METHANE (NATURAL GAS) DETECTOR

To avoid personal safety injury, instrument damage and potential dangerous accident; do not use the product before reading this manual.

13100 Methane (Natural gas) detector is kind of Wall-mounted household gas alarm designed to detect the concentration of combustible gases using high quality air-sensitive component and manufactured with advanced technology-it provides visual and audible signals. This product included three different colors led indicators; the green led for "POWER", the red led for "ALARM" and the yellow led for "MAINTNANC".

13100 gas detector has an "A" type (ALARM+Relay output)and a certificate of conformity to Turkish standards TS-EN 50194.

Relay contact can be used with 2 functions (Normally opened – Normally closed). Can be controlled a Selenoid valve or any other device.

SPECIFICATION

Operation Voltage	230-240V/50Hz
Operation Current	10Ma (standy by) – 20Ma(alarm)
Operation Conditions	Termperature 0-50°C Humidity: <%95
Alarm level	5000 ppm(%0.5)
Alarming method	Visual and audible signals & relay output
Sound level	≥85dB
Relay output	10A 250V AC 5A 100V DC
Dimention	125mm*60mm*50mm
Protective class	IP20
Warranty	2 years

MOUNTING AND USING INSTRUCTIONS

Fix the appliance on the wall at a horizontal distance as 1-2 meters from the cooker or gas source and vertical location should be fix within 0.05-0.15 meters below the roof. This product applies to a fixed power cable system (2*1/5 mm² NYM cable)

Such location should be avoided:

- Covered by other things,
- Directly under the washbasing,
- Near the doors & windows or passage with strong wind,
- Easy polluted or high temperature environment near oven,
- Water fog and drop or such moist place.

Do not use the product at cross purpose

Using 230-240V voltage so dangerous that only the specialist electritions must install and apply.

- This product will be activated in 30 sec. after it is energized.

STATE OF ALERT

If the gas in environment rises above the preset alarm level, the appliance will enter alarm status, the red ALARM light will shine and the buzzer will give sound alarming. Meanwhile the alarm will activate the relay output;

Please calm down and do it following instructions.

- At the same time, put out of the fire and all flame out,
- Please cut off main gas supply and shut off the gas valve promptly
- Check the leakage source.
- Don't try to switch on or off any electric appliance, including mobile phone and such communications tools,
- Open the windows and door for rising air-conditioning
- Ask professional person to eliminate the gas leaking malfunction quickly.
- Please do not call using the phone in the same building.

After re-installation if the ALARM status still continues and the gas leaking source could not find please leave the building as soon as possible and call the gas supplier firm and / or 24 hours open gas service line.

If the ALARM status is over, please be sure the leakage source is certainly off and then turn the main gas supply back to previous position.


WARNING

- 13100 Method (Natural gas) detectors do not detect at the first operating in 3 minutes.
- After 3 minutes – in 3 minutes warming time – the appliance will be ready for the operation. In the meantime only green POWER led will shine and show us the system is working.
- If the yellow MAINTENANCE alarm light is on, it shows there is something wrong with the detector and the detector can't detect gas. Then please contact the distributor.
- The red ALARM led and buzzer can be control such as working or not-working by using test button on the detector.


- 13100 Methane (Natural gas) detectors calibrate themselves periodically so that it achieved constant sense level.
- Please do not use some non calibrated gas to test the detectors, if the gas concentration is too high, it will damage the detectors, also is harmful for human's health
- When the electricity cut off, the gas detector does not operate.
- 13100 Methane (Natural gas) detectors must have test twice a year. How do you test it? Please just give some of gas to the appliance with the lighter when the green led is on (system is working) during 1 minute. If the appliance starts to alert, test passed positively.
- Clean the dust or dirt on the alarm frequently to keep air vent freely and the lights clear.

MOUNTING

Fix the main body to the pre-determined mounting location by making use of two screws provided with the product as shown figure (a) and please pass-through the cable from the hole (b) as shown figure(b)



After the terminal-block connections' please fix the main body to the black-kit using middle plastic taps as shown figure (d)

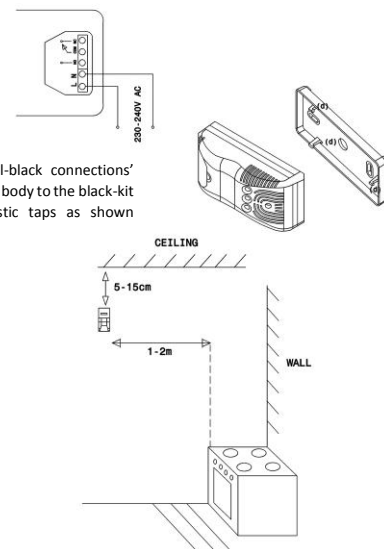

TROUBLESHOOTING

Problem	Cous	Solution
Green power Light is off	Plug connection is not correct it is unplugged	Plug in again
	Light broken	Contact with the distributor
Press test button without alarm sound	Circuit fault	Contact with the distributor
The gas can not detect	The preheat is not finished	Wait unit the preheat ready
	Circuit fault	Contact the distributor
Red led ALARM light is on 'after the warm up	Too much smoke' alcohol or perfume or other volatility gas in the air	Move the clean air and test again
	Stored too long	Warm up form more than 2 hours
	Circuit fault	Contact with the distributor

Natural Gas: Methane

Gas	Basis	Exploding Range
Natural	CH ₄	5% ~15%

LEL: Lowest Explode Level' that is the lowest concentration of the gas in the air, which will cause exploding when meeting with fire.

