

# EVA50 / EVC50 MINI LED

zone 1

zone 2

Ex db IIC Gb Ex tb IIIC Db II2GD

T6  
T 85°C

-20°C

zone 21

zone 22

DIRECTIVE 2014/34/UE

+60°C

**LIGHTING FIXTURE LAMP**  
**LED FLASH or FIX**
**SEGNALATORE LUMINOSO LAMPADA**  
**LED FLASH o FISSA**

IP66



<b>Caratteristiche:</b>	Segnalatore luminoso con lampada LED (FLASH o FISSA) ad elevato rendimento, sono idonee per la segnalazione ostacoli per camini, ciminiere, fiaccole, campanili, palazzi, gru, ponti, torri radiotelevisive, piloni di teleferiche e linee elettriche, generatori eolici, antenne radar e telecomunicazioni e, nello specifico, per il mondo dell'industria petrolchimica e petrolifera. Certificata INERIS, bassi consumi e durata illimitata. Guarnizione O-RING in neoprene per protezione meccanica IP66. Connessione Direttamente al portalamпада L, N, Pe. Sez. max. 4mm2.
<b>Features:</b>	Lighting fixtures with long-life LED (FLASH or FIX), are ideal for chimneys, towers, smokestacks, bell towers, buildings, cranes, bridges, radio/television masts, cable car and power line pylons, wind turbines, radar and telecommunication antennas and specifically for use in the petrochemical and oil industries. INERIS certificate, low consumption and high performance. Neoprene O-RING gasket for protection IP66. Connection Direct to lamp holder L, N, Pe. Max section 4mm2.
<b>Materiali:</b>	Lega di alluminio a basso contenuto di rame, viteria in acciaio inox, Vetro borosilicato resistente agli urti ed alle alte temperature sigillato nella ghiera in alluminio, gabbia in acciaio inox (se richiesta).
<b>Materials:</b>	Low copper content aluminium alloy, stainless steel hardware, Shock and temperature resistant borosilicate glass sealed with aluminium shade ring, stainless steel guard (on request).



EVA50/ML


EVC50/ML

EVA50+KIT/ML



### Specifica tecnica / Technical specification

	EVA50/ML EVC50/ML	EVC50/ML EVC50/ML	EVA50/ML EVC50/ML
Tensione / Voltage	12-24 VAC/VDC	48 VAC	48 VDC
Corrente / Rated current	200mA		200mA
Temperatura / Working temperature	-20°C +60°C		
Frequenza / Frequency	50/60HZ		
Assorbimento medio / Power middle	2W		
Lamp power / Effective Intensity	6J		
Flash-minuto / Flash-minut	75 (other to be defined)		
Servizio / Service	Continuo / Continuous		
Colore corpo / Color body	RED RAL 3000 / Other color on request		
Imbocchi / Cable entries	EVA50 1 x 3/4" - EVC50 2 x 3/4"		

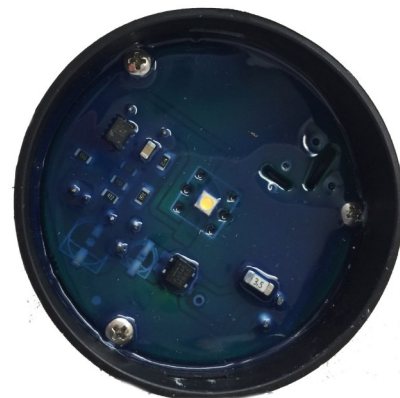

COLORI GEMME: **ROSSO - GIALLO - ARANCIO - VERDE - BLU - BIANCO**  
 Signaling lamps: **Red - yellow - orange - green - blue - white**



Kroma mec S.r.l.

47 LED

