


Conventional Remote Indicator

The conventional remote indicator can be connected to the Axis EN detector base to provide the remote indicator functionality.

The typical application is for outside rooms fitted with fire detection or below loft or voice areas fitted with AFD devices.

Features

- Low profile design
- Red indicator
- Compatible with the full range of Axis EN wired fire detectors with remote alarm indicators (conventional and intelligent)
- No programming required

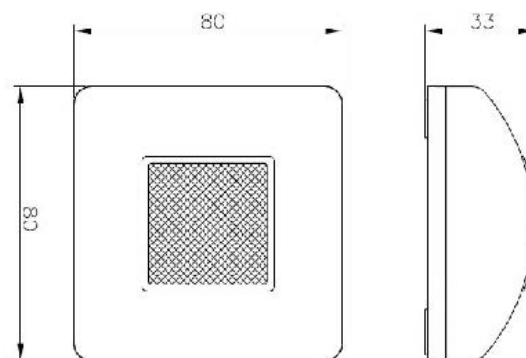

Standards and approvals

- EN 50130-4:2011
- EN 61000-6-3:2017 +A1:2011
- EN 50130-4:2011 +A1:2014
- EN IEC 63000:2018

Specification

Operating voltage	15 VDC - 40 VDC
Average current	4.5mA @ 24 VDC
Dimensions	80 mm x 80 mm x 27 mm
Weight	30 g
Cable size	0.5 - 2.5 mm ²
Operating temperature (no icing)	-10°C to +55°C
Max humidity (non condensing)	95% RH
IP rating	42

Order Codes and Options

[Check if this document is up to date](#) | [Give us feedback](#)

Advanced, The Bridges, Balliol Business Park, Newcastle upon Tyne, NE12 8EW, UK **T:** +44 (0)345 894 7000, **E:** enquiries@advancedco.com,
W: www.advancedco.com

As our policy is one of constant product improvement the right is therefore reserved to modify product specifications without prior notice.