



KEY FEATURES

- Aesthetically appealing design
- Low Current Consumption
- Features 4 x 20mm knockouts for surface and glanded entry
- Simple installation for new or retrofit applications
- Available with/without Buzzer (Buzzer can be disabled via Jumper link)
- Will operate at 12 and 24 Vdc

Eurotech Remote Indicator (300-2012)

A product designed for both conventional and analogue addressable fire alarm systems.

Available as a visual indicator and audible/visual indicator, the Eurotech Remote Indicator can be easily retrofitted to existing systems or incorporated as part of a new installation.


The product is designed to fit any recessed single gang box, giving a flush finish or surface mounted using the surface box.

TECHNICAL SPECIFICATION

Operating Voltage	12 - 28 Vdc
Current Consumption	22mA (Conventional)/Addressable - detector dependant
Weight	0.06 kg
Housing Material	Fire rated ABS
Operating Temperature	-5°C to +50°C
Dimensions of device	116mm x 42mm
Weight	188g
Colour	Red/White
Material	Fire Rated ABS

TECHNICAL DRAWING

Back Cover

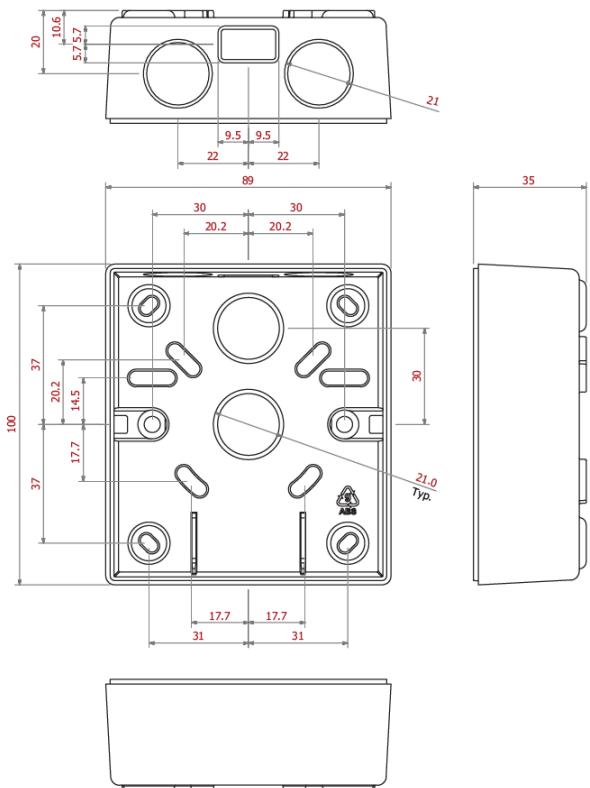

Remote Indicator Unit

