

# EFDC-F EFDC-F-WG

zone 1

zone 2

Ex d IIC Gb - II 2 GD



zone 21

zone 22

Ex tb IIIC Db



EMERGENCY PUSH-BUTTON WITH  
GLASS AND **LIFT FLAP**

T5

T4

T3



PULSANTE DI EMERGENZA CON  
VETRO E **LIFT FLAP**

95°C

130°C

195°C



IP66



EFDC-F-WG (0E) EFDC-F-WG (0SE)	1 NC 1 NC+1 NO	<b>Lift flap e premi (ritorno a molla)</b> <b>Lift flap and push (spring return)</b>	<b>versione standard</b> <b>standard version</b>
EFDC-F-WG (0BE) EFDC-F-WG (0SBE)	1 NC 1 NC+1 NO	<b>Lift flap e premi con aggancio, sblocco a rotazione</b> <b>Lift flap and push latching, rotating to release</b>	<b>a richiesta</b> <b>on request</b>

Fungo rosso Ø35 mm  
Red mushroom Ø35 mm



EFDC-F (0E) EFDC-F (0SE)	1 NC 1 NC+1 NO	<b>Lift flap Rompi il vetro e premi (ritorno a molla)</b> <b>Lift flap Break the glass and push (spring return)</b>	<b>versione standard</b> <b>standard version</b>
EFDC-F (1E) EFDC-F (1SE)	1 NO 1 NO+1NC	<b>Lift flap Rompi il vetro (ritorno a molla automatico)</b> <b>Lift flap Break the glass (automatic spring return)</b>	<b>a richiesta</b> <b>on request</b>
EFDC-F (0BE) EFDC-F (0SBE)	1 NC 1 NC+1 NO	<b>Lift flap Rompi il vetro e premi con aggancio, sblocco a rotazione</b> <b>Lift flap Break the glass and push latching, rotating to release</b>	<b>a richiesta</b> <b>on request</b>

Fungo rosso Ø35 mm  
Red mushroom Ø35 mm


Martello con catena (peso: 150 gr)  
Hammer with chain (weight: 150 gr)

### Specifica tecnica / Technical specification

Tensione / Voltage	690 VAC - 220VDC
Corrente / Rated current	16A
Temperatura Working temperature	-40°C +40°C (T5) -40°C +60°C (T4) -40°C +80°C (T3)
Protezione / Protection	IP66
Materiale / Material	Aluminium
Colore Color	RED RAL3000 <b>OTHER ON REQUEST</b>
Peso / Weight	0,5 Kg
Imbocco / Cable entry	2 x 3/4"
Dimensioni / Dimensions	See detail

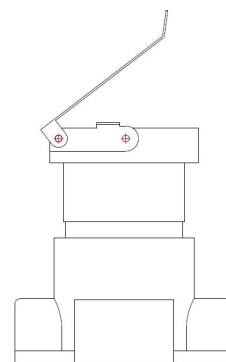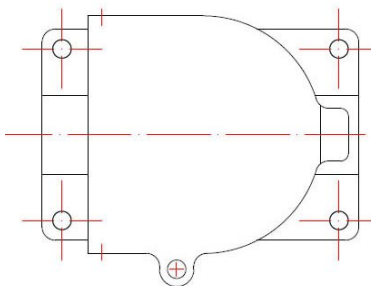

**ALTRI COLORI A RICHIESTA**  
**OTHER COLOR ON REQUEST**

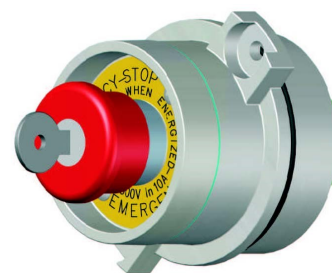

**A RICHIESTA**  
Rompi il vetro e premi con  
aggancio, sblocco a chiave

**ON REQUEST**  
Break the glass and push  
latching, key to release