

RESETTABLE FIRE ALARM CALL POINT 2000-400



SYNCOLN



DESCRIPTION

SYNCOLN Resettable Manual Call Point 2000-400's simple 'RESET' mechanism consists of tough ABS plastic operating elements that simulates break glass activation. It is instantly reusable without environmental hazard caused by fragments of broken glass—making it very suitable for used in food processing plants and places that are prone to false activations such as schools, shopping malls and other high traffic areas.

This versatile call point comes with a red LED with high on/off contrast, and is purpose-designed for both open and closed circuit systems. Alternate terminals are provided for both open and closed circuits. If wired for open circuit operation, the circuit will close instantly when activated. **SYNCOLN 2000-400** also meets the requirements of **BS5839 Part 2** and **EN54 Part 11**.

ADVANTAGES

- Double terminal wire connectors for independent input and output connections which facilitate installations when used in looping.
- No glass elements to break, lose or incorrectly fit when installing.
- Complete functional test with every activation.
- Virtually maintenance free—achieved by an easy reset operation with a simple key.
- Thread protection plugs are provided to protect the brass inserts on the base box (when conceal fixing is needed).
- 3/4"Ø preopened conduit entries from top, bottom and the back are provided for extra convenience.
- Colour matching polythene plugs for conduit entries are included.
- Suitable for surface or flush mounting.

SPECIFICATIONS

Size (H x W x D)	88 X 88 X 53 mm (Surface Mount) 88 X 88 X 20 mm (Flush Mount)
Current Ratings	12/24V DC 10A 48V DC 3A 250V AC 10A
Net/Gross Weight	160/184g
Connections	TERMINAL-MAX 2.5mm ² CABLE

Specifications are subject to change.

OPTIONAL FEATURES


- Transparent Polycarbonate lift-up protective cover.
- Monitoring resistor.
- Blocking diode.
- Specific languages or custom imprints available on facial layout upon request.
- Casing available in different colours.



RANGE OF CASING COLOURS
White, Yellow, Green, Red, Blue



HINGED COVER
(Pack 20)
CP500/550/C

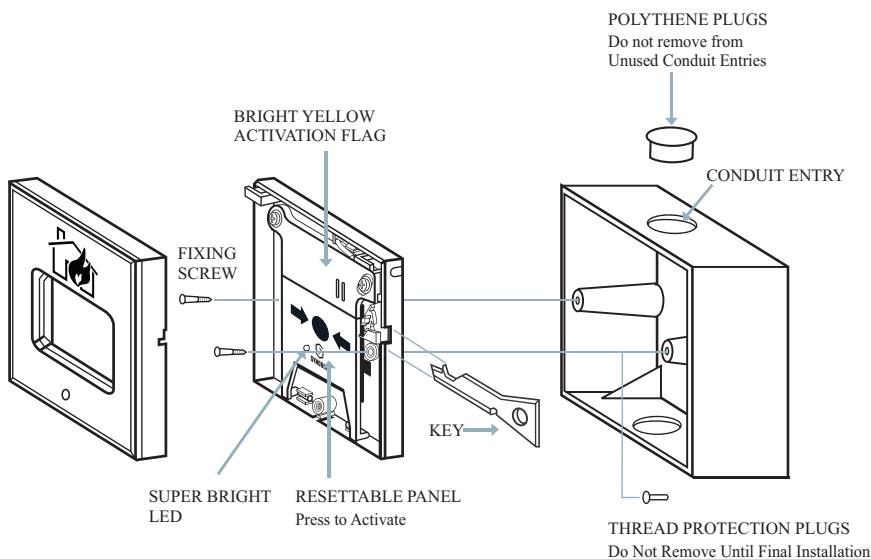

Syncoln Limited

3rd Floor, 14 Hanover Street,
Mayfair, London, W1S 1YH
United Kingdom

Tel: +44 (0)207 514 5813

Fax: +44 (0) 207 514 5811

Email: sales@syncoln.com